
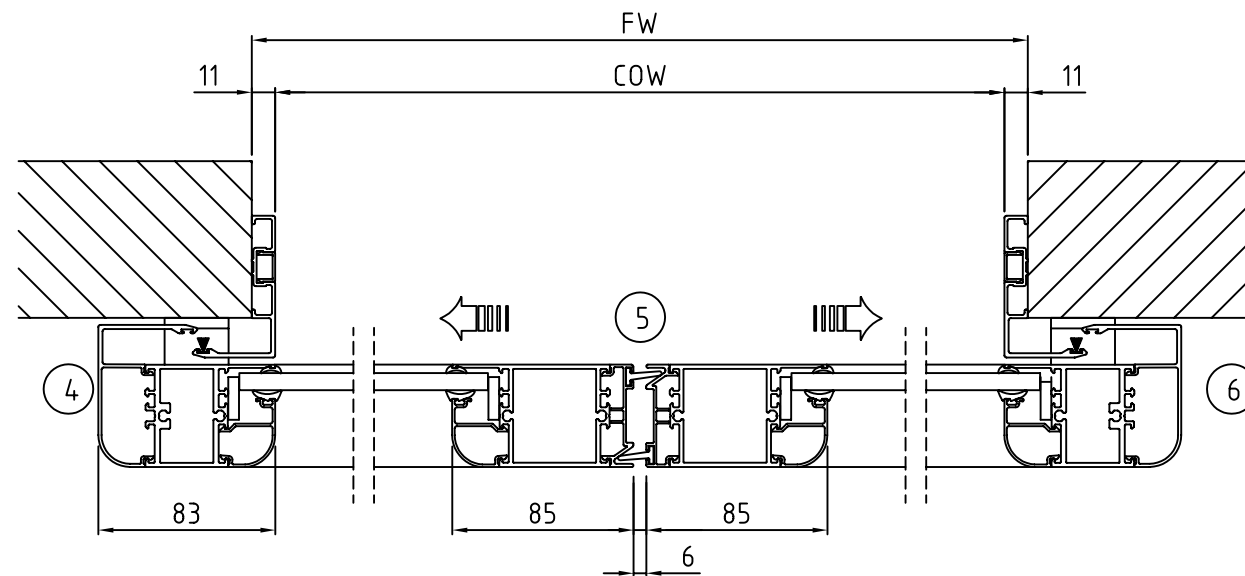


- FW= Frame width
Min. 900 / max. 3000
FW=COW+22
- FH= Frame height
Min. 1900 / max. 3000
- COW= Clear opening width
COW=FW-22
- COH= Clear opening height
COH=FH
- CL= Cover length

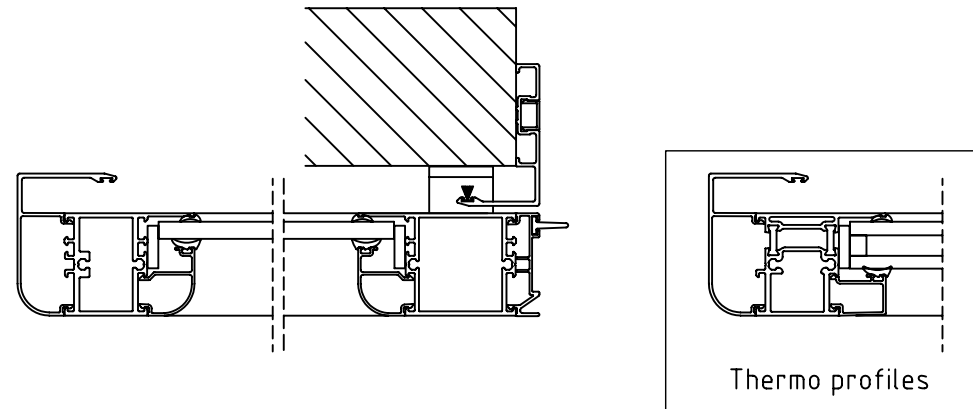

- State when ordering
- FW=.....mm
 - FH=.....mm
 - COW=.....mm
 - COH=.....mm
 - Cover Yes
 - CL=.....mm
 - Midrail 70 Yes
 - Midrail 150 Yes
 - MH=.....mm
 - Bottom rail 178 Yes

- Surface treatment
- Silver anodized
 - Special anodized.....
 - RAL.....
 - Special powder coating.....
 -

- Glass
- 6 mm laminated glass
 - 8 mm laminated glass
 - 6 mm tempered glass
 - 8 mm tempered glass

- (Rectangular glazing beads)
- 6/10/6 mm Insulated lam. glass
 - 8/24/8 mm Insulated lam. glass
 - Thermo profiles

- Lock
- ASSA 2-way Yes
 - Euro 1-way Yes
 - Euro 2-way Yes

Scale 1:5

Customer: _____

Door id: _____

Project No: _____

Besam ref: _____

Date: _____

Sign: _____

ADS Automatic door system
Frame UniSlide
2 Panel wall mounted
Article No. 800058

besam 

D **832965**