


- FW= Frame width  
Min. 1600 / max. 4800  
 $FW=3COW/2+33,5+X$
- FH= Frame height  
Min. 2100 / max. 3150
- X= Safety distance (50 mm)
- COW= Clear opening width  
 $COW=2(FW-33,5-X)/3$
- COH= Clear opening height  
 $COH=FH-195$
- CL= Cover length

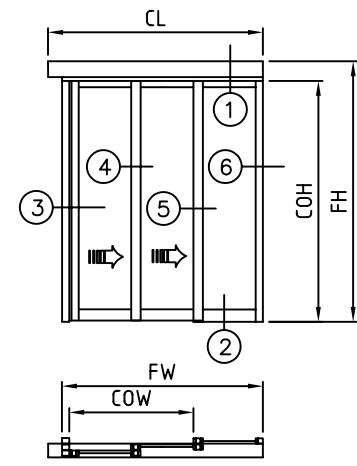

State when ordering  
 FW=.....mm  
 FH=.....mm  
 X=.....mm  
 COW=.....mm  
 COH=.....mm  
 Cover Yes   
 CL=.....mm

Surface treatment  
 Silver anodized   
 Special anodized.....  
 RAL.....  
 Special powder coating.....  
 .....

Glass  
 8 mm laminated glass   
 10 mm laminated glass   
 12 mm laminated glass   
 8 mm tempered glass   
 10 mm tempered glass

Lock  
 Floor lock Euro 1-way Yes   
 Floor lock Euro 2-way Yes

Scale 1:5

Customer: \_\_\_\_\_  
 Door id: \_\_\_\_\_  
 Project No: \_\_\_\_\_

Besam ref: \_\_\_\_\_  
 Date: \_\_\_\_\_  
 Sign: \_\_\_\_\_

**ADS Automatic door system**  
**Slim telescopic UniSlide**  
**3 Panel beam mounted right**  
**Article No. 800228**

**besam** 

F **833065**