



## Besam Sliding Door Operator UniSlide

### High performance

Many of the most valuable features and innovations that characterize Besam's strive for optimal function and performance are combined in the sliding door operator Besam UniSlide. The UniSlide can be integrated as part of Besam Automatic Door Systems but it can also be adapted to a wide range of different door and customer requirements.

### Easy installation

With all units completely assembled in the support beam it is just as easy to install as a replacement as for new installations. Although it is very small and slim in appearance, it is entirely suitable for the heaviest duty applications. During the installation the operator is programmed to comply with the customer's specific requirements.

### No compromise on safety

To permit safe passage between closing doors, the doors immediately reverse if an obstruction is detected,

then resume their interrupted movement at low speed to check whether the obstruction has disappeared or not. If an obstruction is detected between opening doors and surrounding walls or interior fittings, the door immediately stops and then closes after a time delay.

The safety can be further improved by using a Besam presence detection system. People or objects in the doorway are detected and the door is then prevented from closing until it is safe to do so.

To meet the requirements of BS7036:1996 it may be necessary to incorporate additional safety units such as finger/head/body trap protection, presence safety units and in some situations hinged pocket safety screens.

We recommend that you call your Besam area sales contact to assist you in specifying these products. We can help you to ensure that each installation meets the requirements and recommendations of BS7036:1996, BS8300, Building

Regulations and the DDA.

### Design

The drive unit, control unit, transmission – or optional emergency unit and electromechanical locking device – are all assembled in the support beam. The drive unit transmits movement to the door leaves by means of a tooth belt. The door leaves with integrated or separately mounted door adaptors can be adjusted height-, length- and depth-wise. Journalled steel rollers and sliding track made of high-grade plastic give exceptionally smooth and silent operation.




## Self-monitoring

The microprocessor has an integral self-monitoring device which detects any interference or faulty signals in door operation and takes necessary measures to ensure a safe operation.

## Emergency

Besam UniSlide can either be combined with a mechanical emergency unit that automatically opens the doors – or an electronic emergency unit that automatically opens or closes

the doors – in the event of a power failure. The UniSlide can also be interfaced with fire alarms or smoke detectors.

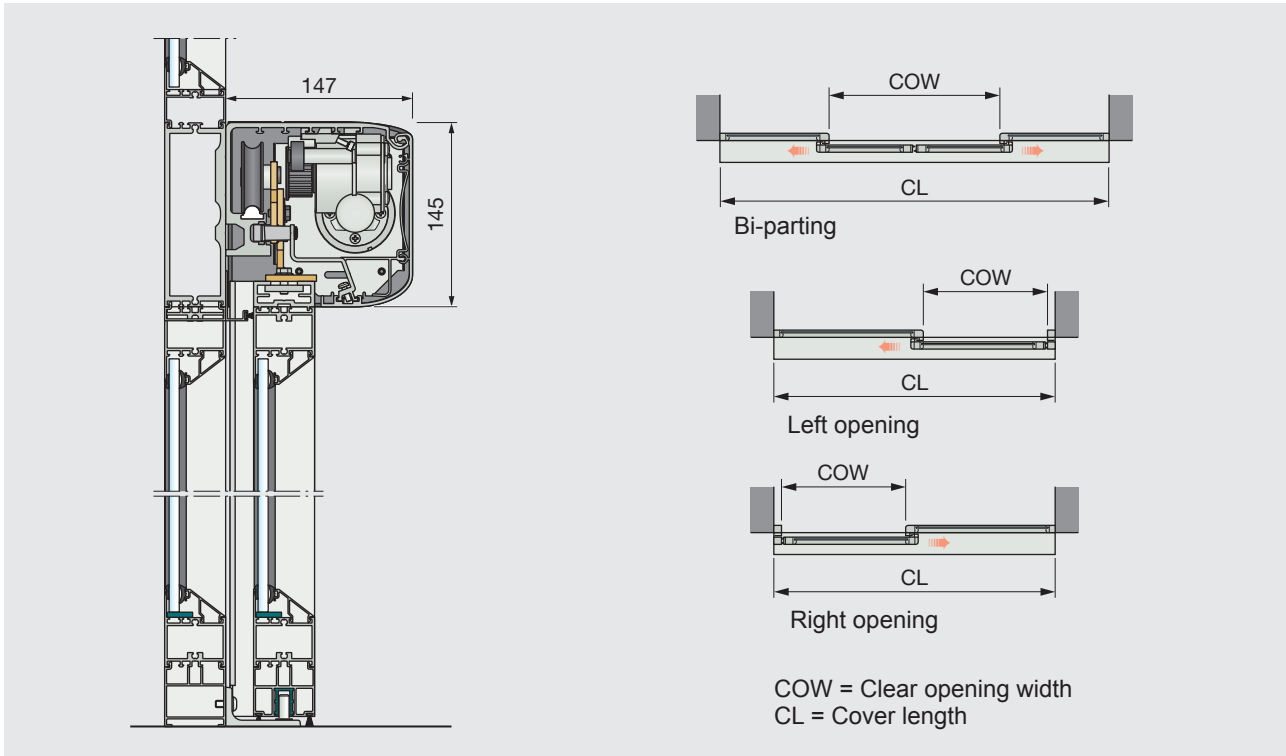

## Technical Data Besam UniSlide

### Models

- UniSlide-2 2 leaves, bi-parting
- UniSlide-1 1 leaf, single-slide, right or left opening

### Standard equipment

Operator including:

- Support beam with transmission
- Electronic control unit with plug-in connections and power supply
- Traffic-controlled opening width
- Synchronizing of two operators

### Accessories and Options

- Cover:
  - Clear anodized aluminium (other anodizing optional)
  - Paint finished in colour RAL 9010 (paint finishes according to RAL chart optional)

- Door adaptor for doors up to 65 mm thickness made by others
- Programme selectors
- Electronic emergency opening or closing unit
- Mechanical emergency opening unit
- Break-out unit
- Emergency button
- Besam approach and presence sensor
- Presence detection photocells
- Electromechanical locking devices
- Interlocking between two operators
- Key switch
- Besam Automatic Door systems

### Technical specifications

Deviating value for E-version in brackets.

- Power supply: 100 V AC -15% to 240 V AC +10%; 50/60 Hz
- Power consumption: max. 250 W
- Recommended max. door weight:
  - UniSlide-2 100 (85) kg/door leaf
  - UniSlide-1 200 (100) kg
- Clear opening:
  - UniSlide-2 900 – 2800 (2000) mm
  - UniSlide-1 900 – 2800 (1500) mm
- Opening and closing speed: variable up to 1,4 (1,0) m/s (2 leaves)
- Hold open time: 0 – 60 s
- Ambient temperature: -20°C to +50°C
- Relative humidity (non-condensing): 5% to 85%



Besam Ltd. Washington House, Brooklands Close, Sunbury on Thames, Middlesex TW16 EQ  
Tel: +44 1932 765 888 Fax: +44 1932 765 864  
info@besam.co.uk • www.besam.com